

Model UCL-ST
Coaxial Fixed Termination
2 Watts DC-12.4GHz



Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

UCL-ST coaxial fixed termination's average power 1W, frequency range dc-12.4GHz and feature wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout.

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 2W average to 25°C ambient temperature, derated linearly to 0.2W @ 125°C.

PEAK POWER: 0.25KW (5μs pulse width with 0.8% duty cycle)

TEMPERATURE RANGE: -55°C~+125°C


CONNECTOR TYPE: SMA

WEIGHT: 2g

PHYSICAL DIMENSIONS: Φ9×11mm

Model Number	Frequency Range(GHz)	Max VSWR
UCL-ST-3	DC-3	1.15
UCL-ST-6	DC-6	1.20
UCL-ST-12.4	DC-12.4	1.25

Outline Drawings

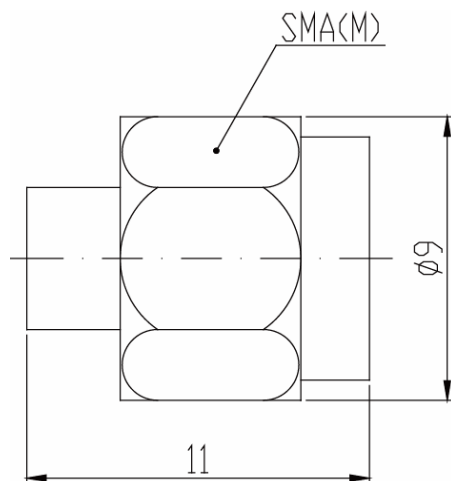

* Dimensions are given in mm and tolerance ±2%.

** VSWR varies according to frequency.