



Model UCL-GHP1500
Coaxial Fixed Attenuator
1500 Watts DC-3GHz



Model Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		20	30	40	50	
UCL-GHP1500-3	DC-3	/	/	±2.0	±2.0	1.40

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

UCL-GHP serial coaxial fixed attenuators' average power 1W-10KW, frequency range DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value,

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 1500W average to 25°C ambient temperature, derated linearly to 150W @ 125°C.

PEAK POWER: 10KW (5μs pulse width with 15% duty cycle)

3rd ORDER INTERMODULATION(Optional):


Reflected Levels(IM3) <-100dBc with two input signals @935MHz and 960MHz with average carrier power levels of +43dBm each.

TEMPERATURE RANGE: -55°C~+125°C

CONNECTOR TYPE: N,7/16,L27

WEIGHT: 32Kg **PHYSICAL DIMENSIONS:** 570 × 170 × 410mm

Outline Drawings

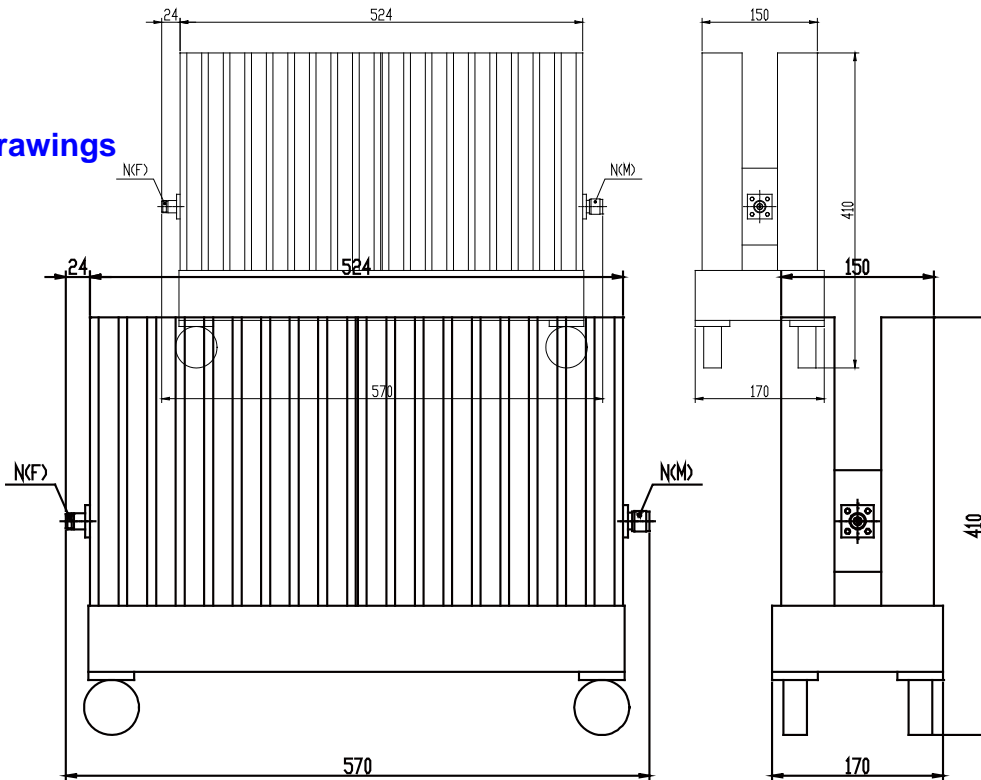

* Dimensions are given in mm and tolerance ±2%.

** VSWR varies according to frequency and attenuation value.

*** VSWR and dimensions refer to connector type N.