



UNIVERSAL COOPERATE LTD.

Model UCL-HTE5

Coaxial Fixed Termination

5 Watts DC-6GHz



Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

UCL-HTE5 coaxial fixed termination's average power 5W, frequency range from DC-6GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 5W

**PEAK POWER:** 1KW (5μs pulse width with 0.5% duty cycle)

**TEMPERATURE RANGE:** -55°C~+125°C


**CONNECTOR TYPE:** N(M)

**WEIGHT:**50g

**PHYSICAL DIMENSIONS:** φ20×51mm

Model Number	Frequency Range(GHz)	Max VSWR
UCL-HTE5-3	DC-3	1.15
UCL-HTE5-6	DC-6	1.25

### Outline Drawings

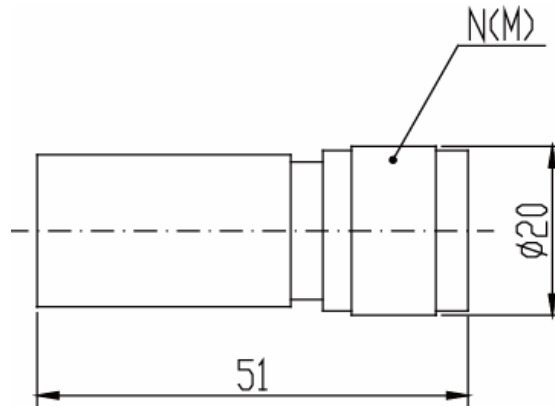

\* Dimensions are given in mm and tolerance ±2%.

\*\* VSWR varies according to frequency.

\*\*\* VSWR and dimensions refer to connector type N.

Universal Cooperate Ltd.

Rep Office:46 Langham Rd Edgware,HA8 9EL The UK

Web: www.ucl-microwave.com

Email: sales@ucl-microwave.com