



UNIVERSAL COOPERATE LTD.

Model UCL-HTEG10

Coaxial Fixed Termination

10 Watts DC-18GHz



Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

UCL-HTEG10 coaxial fixed termination's average power 5W, frequency range from DC-6GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 10W

PEAK POWER: 0.5KW (5μs pulse width with 1% duty cycle)

TEMPERATURE RANGE: -55°C~+125°C


CONNECTOR TYPE: N(J),N(K)

WEIGHT:110g

PHYSICAL DIMENSIONS: φ38×68mm

Model Number	Frequency Range(GHz)	Max VSWR
UCL-HTEG10-3	DC-3	1.10
UCL-HTEG10-6	DC-6	1.15
UCL-HTEG10-12.4	DC-12.4	1.20
UCL-HTEG10-18	DC-18	1.30

Outline Drawings

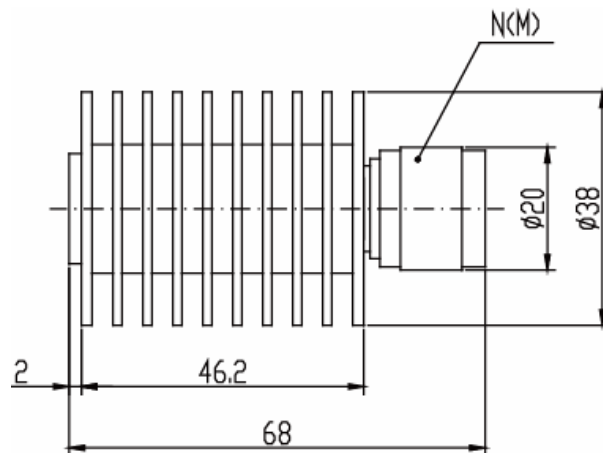

* Dimensions are given in mm and tolerance ±2%.

** VSWR varies according to frequency.

*** VSWR and dimensions refer to connector type N.