



UNIVERSAL COOPERATE LTD.

Model UCL-SSP

Coaxial Fixed Attenuator

2 Watts DC-18GHz



Model Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		1-9	10	20	30	
UCL-SSP-4	DC-4	± 0.5	± 0.5	± 0.7	± 1.0	1.20
UCL-SSP-8	DC-8	± 0.75	± 0.5	± 0.7	± 1.0	1.25
UCL-SSP-12.4	DC-12.4	± 1.0	± 0.75	± 1.0	± 1.2	1.30
UCL-SSP-18	DC-18	± 1.2	± 1.2	± 1.2	± 1.2	1.35

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

UCL-SSP coaxial fixed attenuators' average power 2W, frequency range from DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

NOMINAL IMPEDANCE: 50 Ω

AVERAGE POWER: 2W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C.

PEAK POWER: 0.25KW (5 μ s pulse width with 0.8% duty cycle)


TEMPERATURE RANGE: -55°C~+125°C

CONNECTOR TYPE: SMA(M,F)

WEIGHT: 10g

PHYSICAL DIMENSIONS: $\Phi 10 \times 30$ mm

Outline Drawings

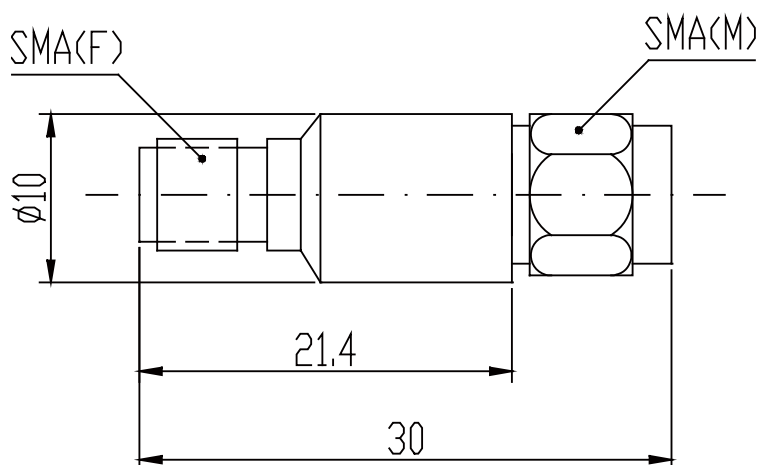

* Dimensions are given in mm and tolerance $\pm 2\%$.

** VSWR varies according to frequency and attenuation value.

Universal Cooperate Ltd.

Rep Office: 46 Langham Rd Edgware, HA8 9EL The UK

Web: www.ucl-microwave.com

Email: sales@ucl-microwave.com