



UNIVERSAL COOPERATE LTD.

Model UCL-HP25G

Coaxial Fixed Attenuator

25 Watts DC-18GHz



Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy(dB)				Max VSWR
		10	20	30	40	
UCL-HP25G-4	DC-4	± 0.3	± 0.4	± 0.4	± 0.75	1.15
UCL-HP25G-8	DC-8	± 0.4	± 0.5	± 0.5	± 0.75	1.20
UCL-HP25G-12.4	DC-12.4	± 0.75	± 1.0	± 1.0	± 1.0	1.30
UCL-HP25G-18	DC-18	± 1.0	± 1.2	± 1.25	± 1.5	1.40

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

UCL-HP25G serial coaxial fixed attenuators' average power 1W-10KW, frequency range DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

NOMINAL IMPEDANCE: 50 Ω

AVERAGE POWER: 25W average to 25 $^{\circ}$ C ambient temperature, derated linearly to 2.5W @ 125 $^{\circ}$ C.

PEAK POWER: 1KW (5 μ s pulse width with 2.5% duty cycle)

3rd ORDER INTERMODULATION(Optional):

Reflected Levels(IM3) <-100dBc with two input signals @935MHz and 960MHz with average carrier power levels of +43dBm each.


TEMPERATURE RANGE: -55 $^{\circ}$ C ~ +125 $^{\circ}$ C

CONNECTOR TYPE: N, SMA

WEIGHT: 220g

PHYSICAL DIMENSIONS: $\Phi 45 \times 77$ mm

Outline Drawings

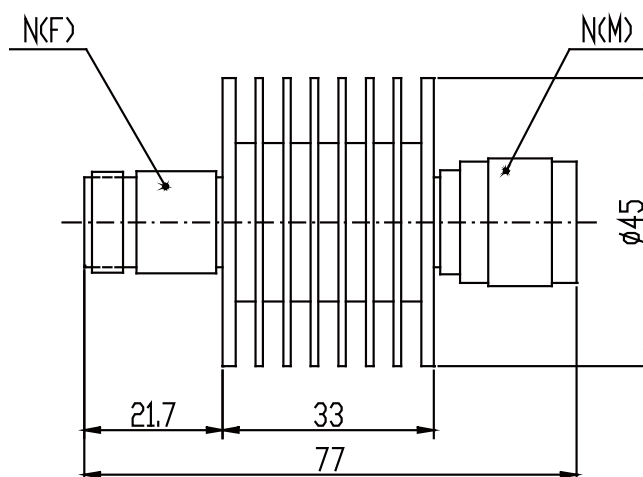

* Dimensions are given in mm and tolerance $\pm 2\%$.

** VSWR varies according to frequency and attenuation value.

*** VSWR and dimensions refer to connector type N.

Universal Cooperate Ltd.

Rep Office: 46 Langham Rd Edgware, HA8 9EL The UK

Web: www.ucl-microwave.com

Email: sales@ucl-microwave.com