



UNIVERSAL COOPERATE LTD.

Model UCL-WHP50

Coaxial Fixed Attenuator

50 Watts DC-10GHz



Model Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)					Max VSWR
		3/6	10	20	30	40	
UCL-WHP50-2.5	DC-2.5	±0.3	±0.3	±0.3	±0.3	±0.3	1.10
UCL-WHP50-4	DC-4	±0.3	±0.3	±0.3	±0.3	±0.3	1.20
UCL-WHP50-6	DC-6	±0.5	±0.5	±0.5	±0.5	±0.5	1.30
UCL-WHP50-8	DC-8	±0.6	±0.6	±0.6	±0.6	±0.6	1.30
UCL-WHP50-10	DC-10	±0.8	±0.8	±0.8	±0.8	±0.8	1.35

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

UCL-WHP50 serial coaxial fixed attenuators' average power from 50W-500W, frequency range from DC-10GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 50W average to 25°C ambient temperature, derated linearly to 5W @ 125°C.

PEAK POWER: 5KW (5μs pulse width with 1% duty cycle)

3rd ORDER INTERMODULATION(Optional):

Reflected Levels(IM3) <-100dBc with two input signals @935MHz and 960MHz with average carrier power levels of +43dBm each.


TEMPERATURE RANGE: -55°C ~+125°C

CONNECTOR TYPE: 7/16(DC-4),N

WEIGHT: 815g

PHYSICAL DIMENSIONS: 112×130×75mm

Outline Drawings

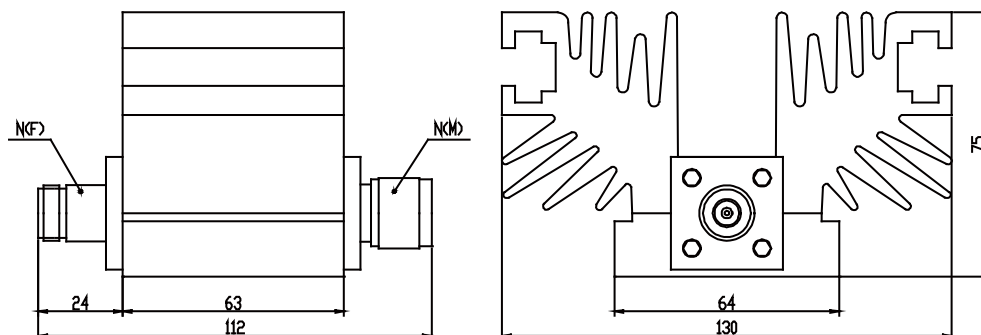

* Dimensions are given in mm and tolerance ±2%.

** VSWR varies according to frequency and attenuation value.

*** VSWR and dimensions refer to connector type N.

Universal Cooperate Ltd.

Rep Office: 46 Langham Rd Edgware, HA8 9EL The UK

Web: www.ucl-microwave.com

Email: sales@ucl-microwave.com