



Model UCL-VA2-3-101-X-A4

Rotary Step Attenuator

2 Watts DC-3GHz




Rotary Step attenuators can be used to adjust the power signal level by step within certain frequency range without power off, they can also be used to adjust the test system's power level as inset attenuators, it is small with high accuracy and high stability etc.

UCL-VA serial A4 type rotary step attenuators' average power 2W, frequency range from DC-3GHz, attenuation value 0-101dB by 0.1dB step.

NOMINAL IMPEDANCE: 50Ω
AVERAGE POWER: 2W.
PEAK POWER: 100W (5μs pulse width with 2% duty cycle)
TEMPERATURE RANGE: -20°C ~+85°C
CONNECTOR TYPE: N(F,F)
WEIGHT: 1.25Kg
PHYSICAL DIMENSIONS: 255×88×80mm

Model Number	Frequency Range(GHz)	Attenuation Step	Max VSWR	Insertion Loss(dB)	Attenuation Accuracy(dB)
UCL-VA2-3-101-1-A4	DC-1	0-101dB in 0.1dB steps	1.25	≤0.8	±0.2dB(0.1~1dB) ±0.4dB(1~10dB)
UCL-VA2-3-101-2.5-A4	DC-2.5		1.5	≤1.5	±0.8dB(10~60dB) ±1.5dB(<70dB)
UCL-VA2-3-101-3-A4	DC-3		1.6	≤1.5	±4%(≥70dB)

Outline Drawings

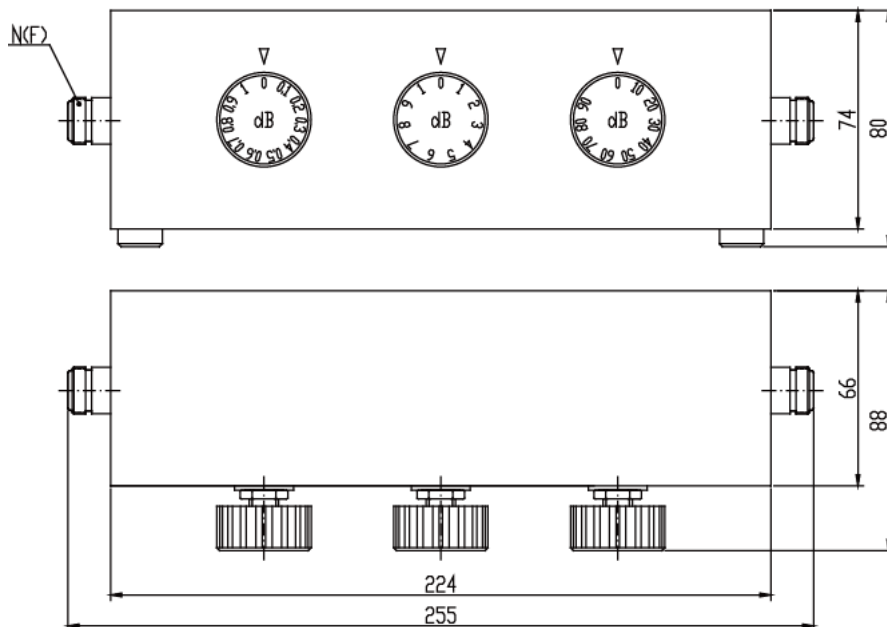

* Dimensions are given in mm and tolerance ±2%.
 ** VSWR varies according to frequency and attenuation value.
 *** VSWR and dimensions refer to connector type N.