

SMA-FEMALE POWER DIVIDER 0.5-3GHZ 4-WAY


UCL-4PD053-10S

SPECIFICATIONS

ELECTRICAL:

FREQUENCY RANGE:0.5-3GHZ
 ISOLATION:18DB MIN
 INSERTION LOSS:1.6DB MAX
 POWER HANDLING:10W MAX
 VSWR:1.3 MAX
 PHASE BALANCE:±8°MAX
 AMPLITUDE BALANCE:±0.5DB MAX
 IMPEDANCE:50OHMS
 CONNECTORS:SMA-FEMALE
 OPERATING TEMPERTATURE:-35°C +80°C

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

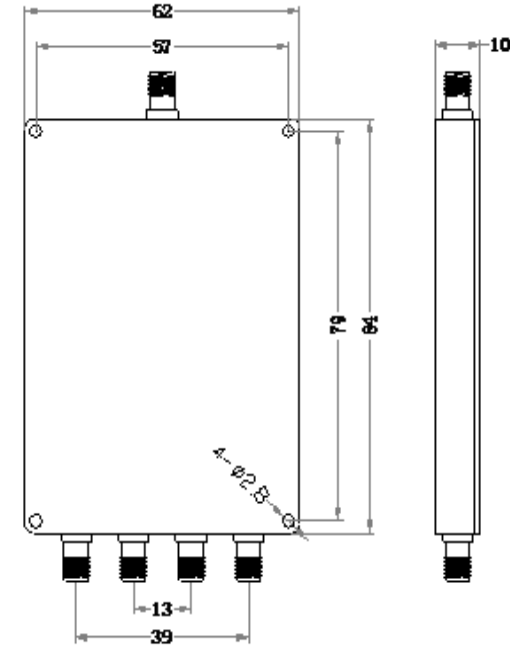

Universal Cooperate Ltd.

Web:www.ucl-microwave.com

46 Langham Rd
Edgware,
HA8 9EL The UK

TITLE

SMA-FEMALE POWER DIVIDER 0.5-3GHZ 4-WAY

SIZE	CAGE CODE	MODEL	REV
A		UCL-4PD053-10S	A

SCALE 1:1

DOC FAMILY PD

SHEET 1 OF 1