

# SMA-K BANDPASS FILTER 19100-24900MHZ

UCL-BPF1924-S

## ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE :19100-24900MHZ


INSERTION LOSS: 2.0DB MAX

REJECTION:40DB @ 15800MHZ & 28200MHZ

VSWR:1.8 MAX

CONNECTORS: SMA-K

OPERATION TEMPERATURE: -40 ~ +70°C

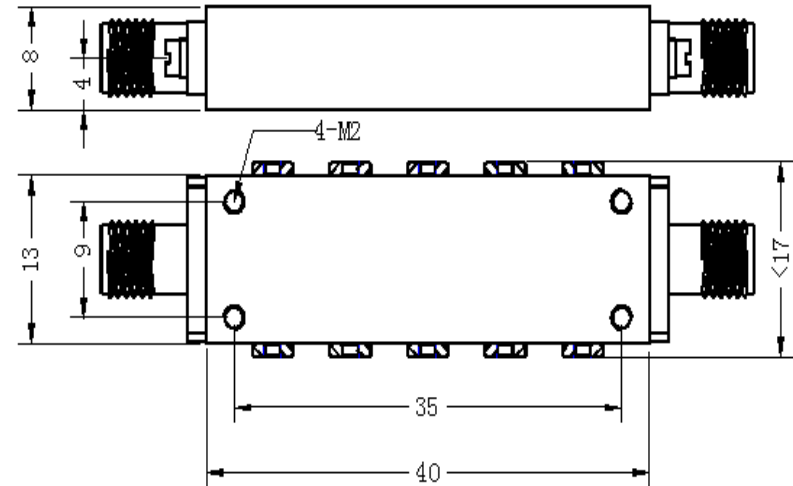

| REVISION HISTORY |                    |           |          |
|------------------|--------------------|-----------|----------|
| REV              | DESCRIPTION        | DATE      | APPROVED |
| A                | PRODUCTION RELEASE | 6/10/2005 | YF       |



**Universal Cooperate Ltd.**

Web:www.ucl-microwave.com

46 Langham Rd  
Edgware,  
HA8 9EL The UK

TITLE

**SMA-K BANDPASS FILTER 19100-24900MHZ**

SIZE

**A**

CAGE CODE

MODEL

**UCL-BPF1924-S**

REV

**A**

SCALE 1:1

DOC FAMILY BPF

SHEET 1 OF 1