

# SMA BANDPASS FILTER 2000-2400MHZ

UCL-BPF2200-SMA

## ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE :2000-2400MHZ

INSERTION LOSS: 2.0DB MAX


REJECTION:42DB @ 1500MHZ & 2700MHZ


VSWR:1.5 MAX

CONNECTORS: SMA-K

OPERATION TEMPERATURE: 0 ~ +55°C

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

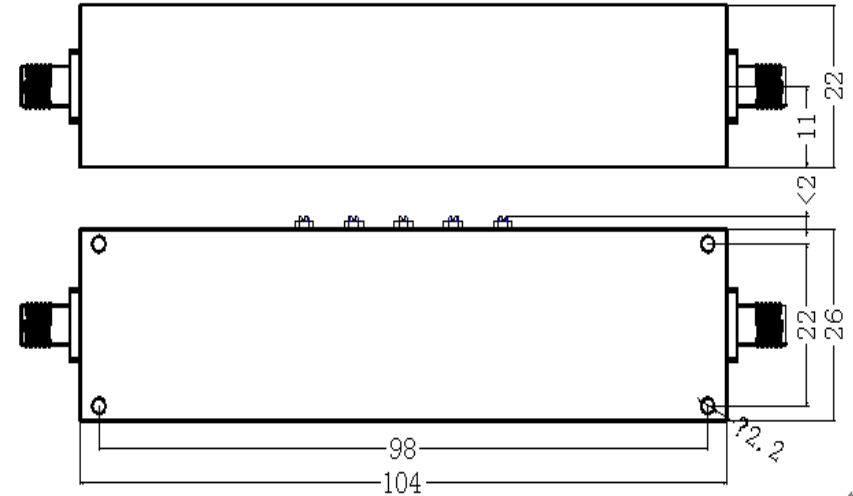

 <b>Universal Cooperate Ltd.</b> Web:www.ucl-microwave.com		46 Langham Rd Edgware, HA8 9EL The UK	
TITLE			
<h2>SMA BANDPASS FILTER 2000-2400MHZ</h2>			
SIZE	CAGE CODE	MODEL	REV
<b>A</b>		<b>UCL-BPF2200-SMA</b>	<b>A</b>
SCALE 1:1	DOC FAMILY BPF	SHEET 1 OF 1	