


BANDPASS FILTER CENTER FREQUENCY 40MHZ


UCL-BPF40M-S

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE :33.5-46.5MHZ (TYP:10MHZ BANDWIDTH)
 INSERTION LOSS: 1.8DB MAX
 REJECTION:40DB @ 30MHZ & 52MHZ
 VSWR:1.5 MAX
 CONNECTORS: SMA-K
 OPERATION TEMPERATURE: -40 ~ +70°C
 SURFACE COLOR: SILVER

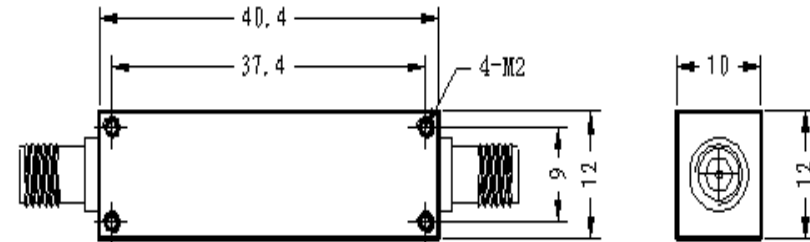

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

 Universal Cooperate Ltd. Web:www.ucl-microwave.com		46 Langham Rd Edgware, HA8 9EL The UK	
TITLE			
BANDPASS FILTER CENTER FREQUENCY 40MHZ			
SIZE	CAGE CODE	MODEL	REV
A		UCL-BPF40M-S	A
SCALE 1:1		DOC FAMILY BPF	SHEET 1 OF 1