


BANDPASS FILTER 47.5MHZ-52.5MHZ 1W

UCL-BPF50M-S


ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE :47.5-52.5MHZ
 INSERTION LOSS: 2.0DB MAX
 REJECTION:40DB @ 40MHZ & 62MHZ
 VSWR:1.5 MAX
 CONNECTORS: SMA-K
 OPERATION TEMPERATURE: -40 ~ +70°C
 SURFACE COLOR: SILVER

* In order to guarantee the loss, the actual bandwidth will be wider

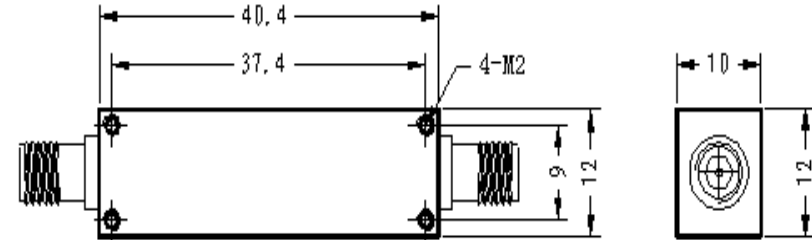

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

 Universal Cooperate Ltd. Web:www.ucl-microwave.com		46 Langham Rd Edgware, HA8 9EL The UK	
TITLE BANDPASS FILTER 47.5MHZ-52.5MHZ 1W			
SIZE A	CAGE CODE	MODEL UCL-BPF50M-S	REV A
SCALE 1:1		DOC FAMILY BPF	SHEET 1 OF 1