

TERMINATION 40 GHZ 2.92-MALE 0.5 WATT

UCL-HT05-40G

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-40 GHZ
 VSWR @ 40GHZ: 1.25:1 MAX
 POWER (AVG): 0.5 WATT
 POWER (PEAK): 250 WATTS
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55 to+125°C

MECHANICAL:


MATERIAL BODY: PASSIVATED STAINLESS STEEL
 MATERIAL CONTACT: BeCu
 CONTACT PLATING: Au PER MIL-G-45204
 COUPLING NUT TORQUE: 8-10 IN-LBS

INTERFACE: MIL-STD-348A

ROHS COMPLIANT

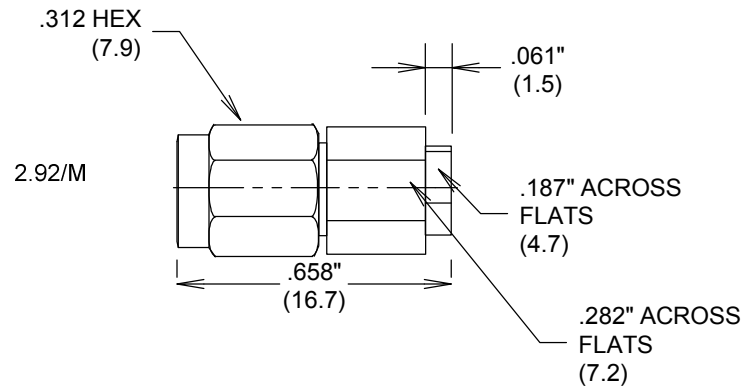

MEASUREMENTS BELOW ARE TYPICAL

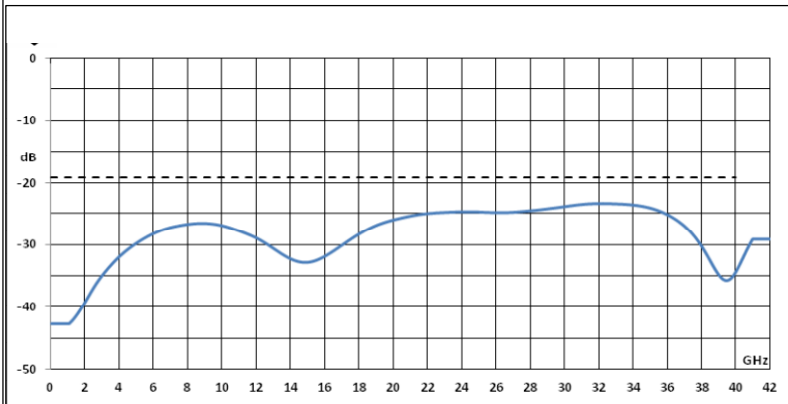

ALL DIMENSIONS IN inches(MM) Typical

Universal Cooperate Ltd. Web: www.ucl-microwave.com		46 Langham Rd Edgware, HA8 9EL The UK	
TITLE			
TERMINATION 40 GHZ 2.92-MALE 0.5 WATT			
SIZE	CAGE CODE	MODEL	REV
A		UCL-HT05-40G	A
SCALE 1:1		DOC FAMILY	SHEET 1 OF 1