

2.92 POWER DIVIDER 2-WAY 15-40 GHZ

UCL-PS1540G-2

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 15-40 GHZ
 VSWR 1.80:1 MAX
 INPUT POWER: 10 WATTS MAX
 ISOLATION: 13 DB MIN
 INSERTION LOSS: 1.2 DB
 AMPLITUDE BALANCE: 0.8 DB MAX
 PHASE BALANCE: 10 DEGREES MAX
 IMPEDANCE: 50 OHMS

CONNECTORS:

PASSIVATED STAINLESS STEEL
 CONTACTS BeCu
 CONTACT PLATING: Au per MIL-G-45204
 INTERFACE: MIL-STD-348A

ENVIRONMENTAL:

TEMP: -55 C TO +125 C

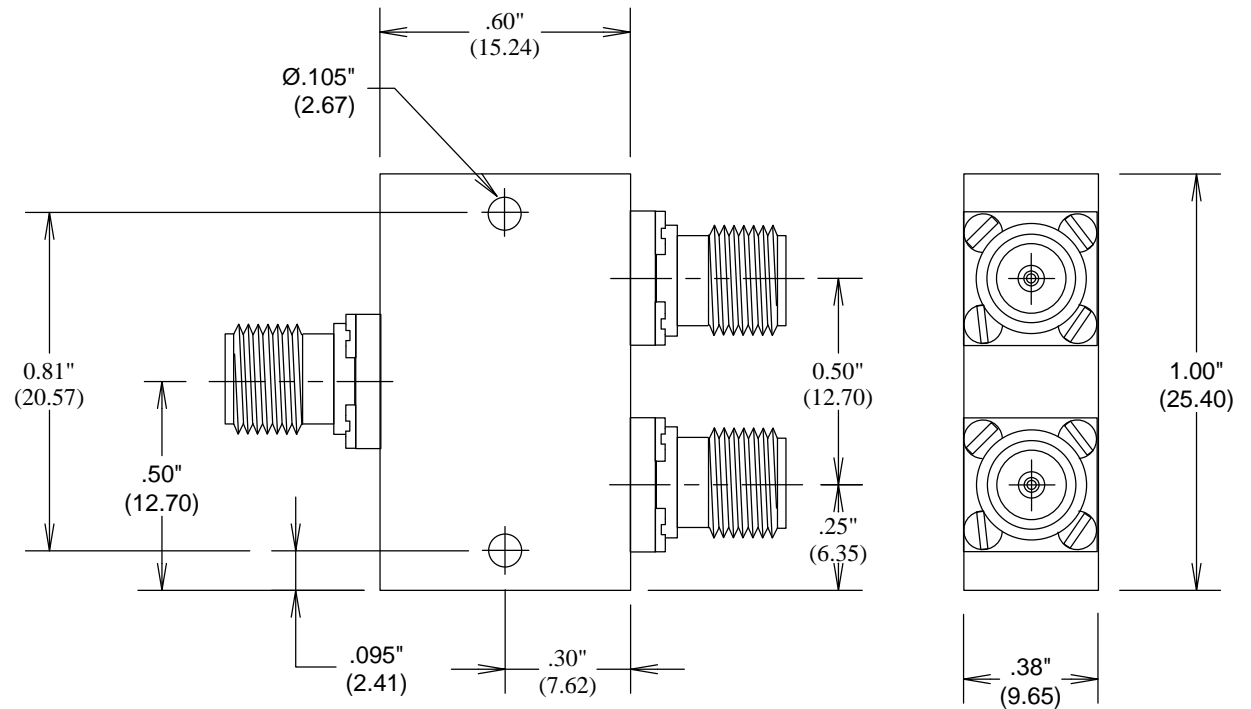

		Universal Cooperate Ltd.			
		Web: www.ucl-microwave.com E-mail: sales@ucl-microwave.com			
		TITLE			
		2.92 POWER DIVIDER 2-WAY 15-40 GHZ			
ALL DIMENSIONS IN inches(MM) Typical		SIZE	CAGE CODE	DWG NO	REV
		A	3FKR5	UCL-PS1540G-2	A
		SCALE		SHEET	