

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF


BANDPASS FILTER CENTRAL FREQUENCY132


UCL-BPF132-S

SPECIFICATIONS

ELECTRICAL

FREQUENCY CENTER:132MHZ
 FREQUENCY CENTREINSERTION LOSS:8.0DB MAX
 BANDWITH: $F_0 \pm 2.5$ MHZ
 REJECTION:30DB@ $F_0 \pm 10$ MHZ
 VSWR:1.50:1 MAX
 CONNECTORS: SMA-K
 OPERATION TEMPERATURE:-40~+70 °C
 IMPEDANCE:50OHM
 POWER:1WMAX

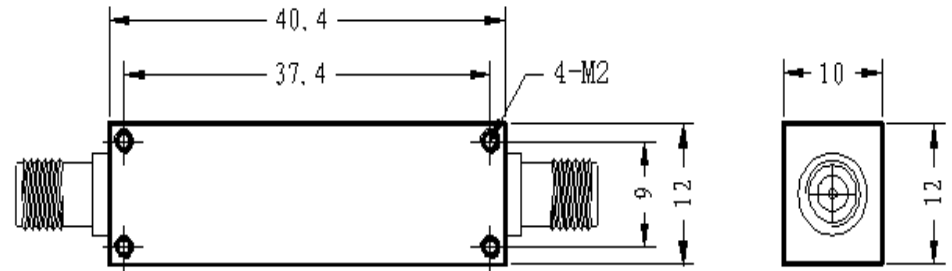

 Universal Cooperate Ltd. Web:www.ucl-microwave.com		46 Langham Rd Edgware, HA8 9EL The UK	
TITLE BANDPASS FILTER CENTRAL FREQUENCY132			
SIZE A	CAGE CODE	MODEL UCL-BPF132-S	REV A
SCALE 1:1		DOC FAMILY BPF	SHEET 1 OF 1