


BANDPASS FILTER 1611.78-1619.94MHz 20W

UCL-BPF1615.86-S

FREQUENCY RANGE:1611.78-1619.94MHZ
 INSERTION LOSS:2.6DB MAX
 VSWR:1.5 @1613.6-1617.6MHZ
 CONNECTORS:SMA-K
 RIPPLE:1.8DB
 OPERATION TEMPERATURE:-40°C ~ +70°C
 SURFACE COLOR:BLACK
 POWER HANDLING:20W
 REJECTION: ≤ 50dB@1580MHz&1650MHz
 ≤ 70dB@1268MHz
 ≤ 20dB@1602MHz

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

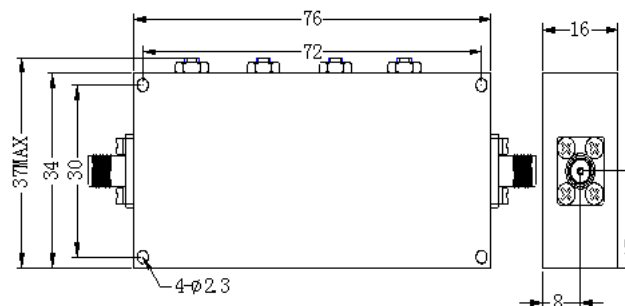

Universal Cooperate Ltd.

Web:www.ucl-microwave.com

46 Langham Rd
 Edgware,
 HA8 9EL The UK

TITLE			
BANDPASS FILTER 1611.78-1619.94MHz20W			
SIZE	CAGE CODE	MODEL	REV
A		UCL-BPF1615.86-S	A
SCALE 1:1	DOC FAMILY BPF	SHEET 1 OF 1	