



Model UCL-HP80

Coaxial Fixed Attenuator

80 Watts DC-4GHz



Model Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		10	20	30	40-50	
UCL-HP80-1	DC-1	± 0.4	± 0.3	± 0.3	± 0.4	1.10
UCL-HP80-2	DC-2	± 0.5	± 0.4	± 0.5	± 0.5	1.20
UCL-HP80-3	DC-3	± 0.6	± 0.5	± 0.6	± 0.6	1.30
UCL-HP80-4	DC-4	± 0.75	± 0.7	± 0.75	± 0.75	1.35

Note: XX refer to attenuation value in dB

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

UCL-HP80 serial coaxial fixed attenuators' average power 1W-10KW, frequency range DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

NOMINAL IMPEDANCE: 50 Ω

AVERAGE POWER: 80W average to 25 $^{\circ}$ C ambient temperature, derated linearly to 8W @ 125 $^{\circ}$ C.

PEAK POWER: 10KW (5 μ s pulse width with 0.8% duty cycle)
3rd ORDER INTERMODULATION(Optional):

Reflected Levels(IM3) <-100dBc with two input signals @935MHz and 960MHz with average carrier power levels of +43dBm each.


TEMPERATURE RANGE: -55 $^{\circ}$ C ~+125 $^{\circ}$ C

CONNECTOR TYPE: N,SMA,7/16,TNC,BNC

WEIGHT: A: 1.75Kg

PHYSICAL DIMENSIONS: A: 177 \times 98 \times 60mm

Outline Drawings

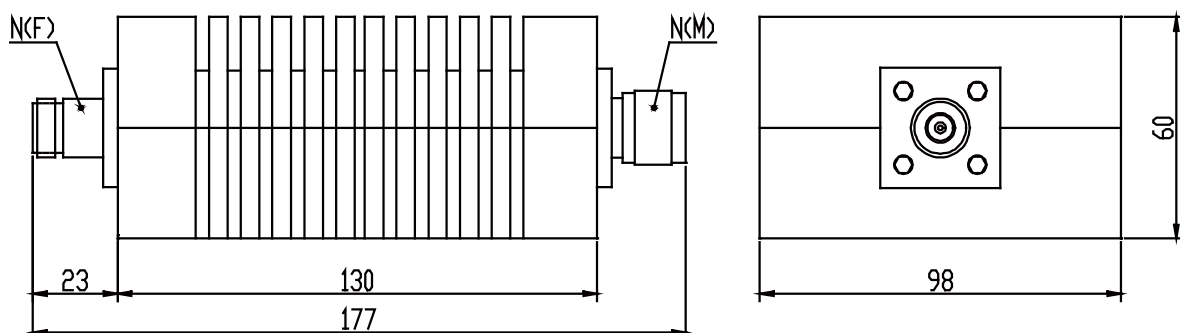

* Dimensions are given in mm and tolerance $\pm 2\%$.

** VSWR varies according to frequency and attenuation value.

*** VSWR and dimensions refer to connector type N.