

# SMA-FEMALE POWER DIVIDER 0.5-3GHZ 6-WAY


UCL-6PD053-10S

## SPECIFICATIONS

### ELECTRICAL:

FREQUENCY RANGE:0.5-3GHZ  
 ISOLATION:18DB MIN  
 INSERTION LOSS:2.6DB MAX  
 POWER HANDLING:10W MAX  
 VSWR:1.5 MAX  
 PHASE BALANCE:±15°MAX  
 AMPLITUDE BALANCE:±1.2DB MAX  
 IMPEDANCE:50OHMS  
 CONNECTORS:SMA-FEMALE  
 OPERATING TEMPERTATURE:-35°C +80°C

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	6/10/2005	YF

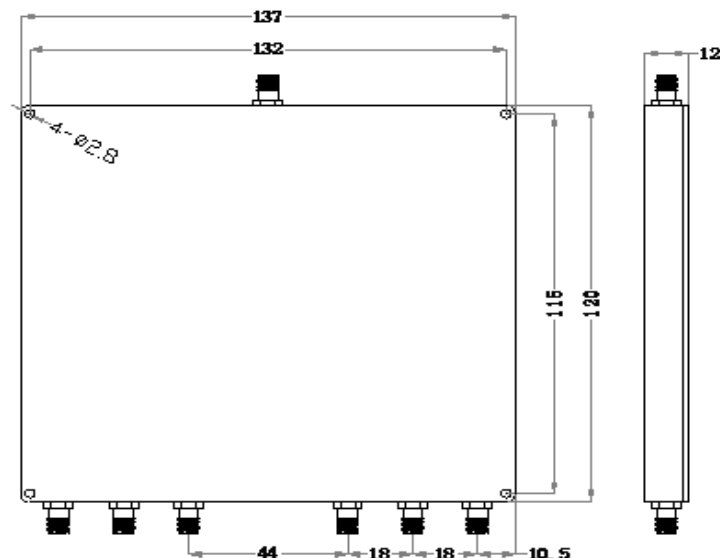

**Universal Cooperate Ltd.**

Web:www.ucl-microwave.com

46 Langham Rd  
Edgware,  
HA8 9EL The UK

TITLE

**SMA-FEMALE POWER DIVIDER 0.5-3GHZ 6-WAY**

SIZE	CAGE CODE	MODEL	REV
<b>A</b>		<b>UCL-6PD053-10S</b>	<b>A</b>

SCALE 1:1

DOC FAMILY PD

SHEET 1 OF 1