

WIDE BAND LOW NOISE AMPLIFIER 8GHZ~12GHZ

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION		

UCL-LNA0812-31-19.5-S

SPECIFICATIONS

ELECTRICAL

Parameter	Min.	Typ.	Max.	Units
Frequency Range	8		12	GHz
Gain	29	32		dB
Gain Flatness		±1.0		dB
Gain Variation Over Temperature (-45 ~ +85°C)		±0.8	±1.0	dB
Noise Figure		2.0	2.3	dB
Input VSWR		1.7	2.0	: 1
Output VSWR		1.5	2.0	: 1
Output 1dB Compression Point (P1dB)	17.5	19.5		dBm
Saturated Output Power (Psat)		20.5		dBm
Output Third Order Intercept (IP3)		25		dBm
Supply Current (Vcc=+12V)		200	230	mA
Isolation S12		-55		dB

Weight	0.71 ounces	Impedance	50 ohms
Input /Output Connectors	SMA-Female	Material	Aluminum
Finish	Standard: Gold 40 micron; Nickel 220 micron thickness	Package Sealing	Epoxy Sealed (Standard)
	Option: Gold 80 micron; Nickel 180 micron thickness		Hermetically Sealed (Option with extra charge)

Absolute Maximum Ratings

Operating Voltage	+15V
RF Input Power	-10dB m

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +12V biasing

Power OFF Procedure

Step 1	Turn off +12V biasing
Step 2	Remove RF connection
Step 3	Remove Ground


Environmental Specifications

Operational Temperature	-45°C~+85°C
Storage Temperature	-55°C~+125°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un- controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)

Heat Sink required during operation(Sold Separately)

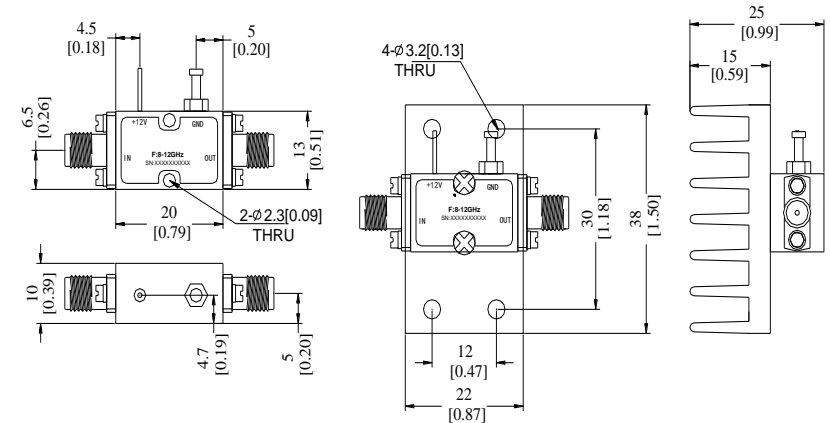

Universal Cooperate Ltd.

Web:www.ucl-microwave.com


46 Langham Rd
Edgware,
HA8 9EL The UK

TITLE


WIDE BAND LOW NOISE AMPLIFIER 8GHZ~12GHZ

SIZE	CAGE CODE	MODEL	REV
A		UCL-LNA0812-31-19.5-S	A
SCALE 1:1		DOC FAMILY	


Gain @+25°C

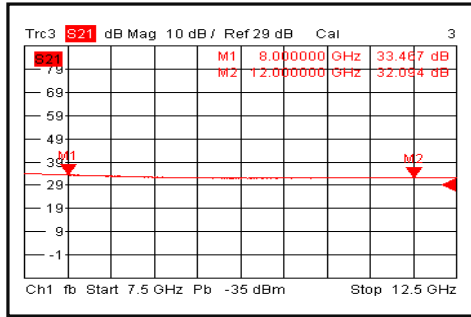


Input VSWR @+25°C

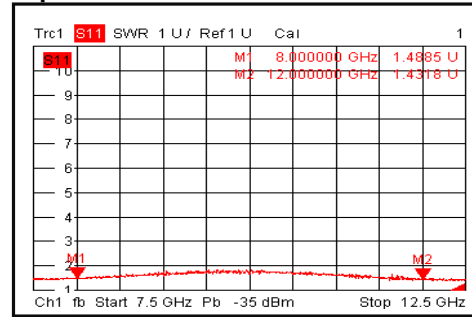


Output VSWR @+25°C

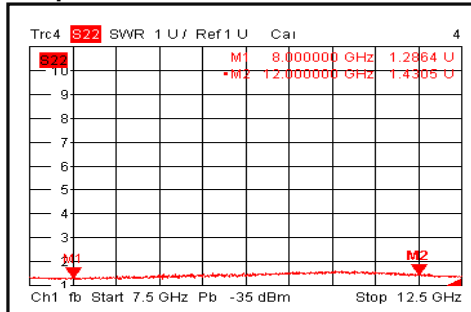


Isolation @+25°C

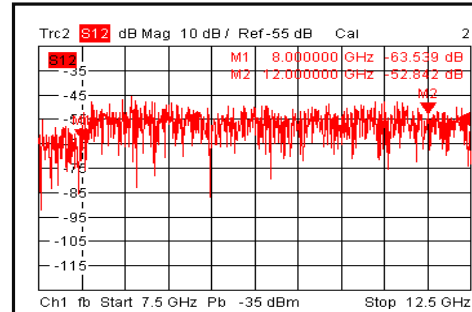


Gain @-45°C

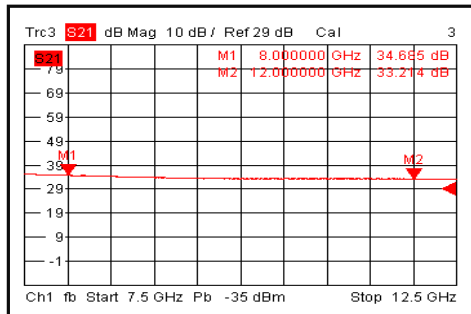


Input VSWR @-45°C

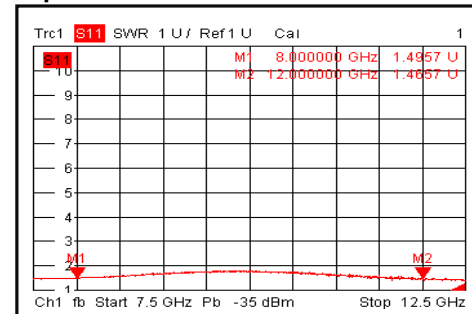


Output VSWR @-45°C

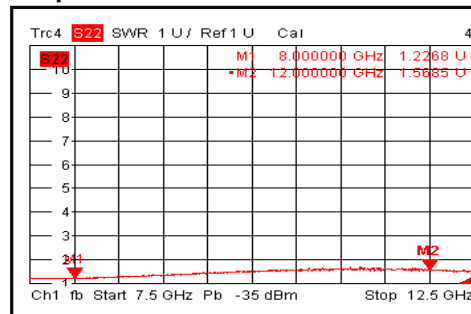


Isolation @-45°C

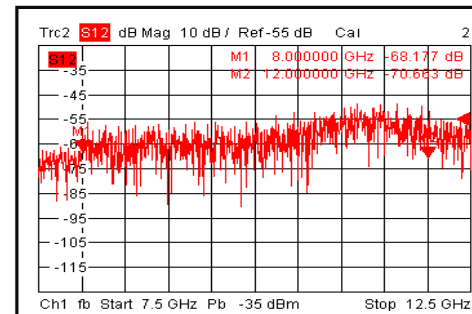


Gain @+85°C

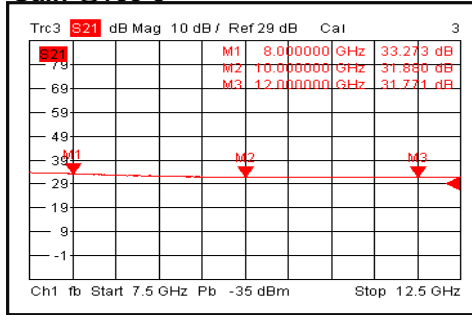


Input VSWR @+85°C

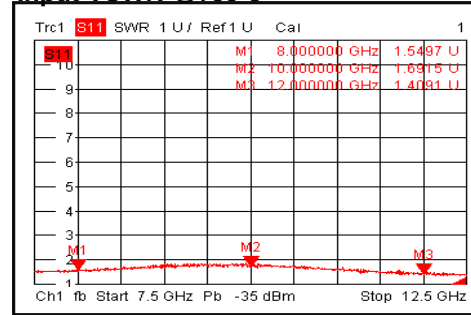


Output VSWR @+85°C

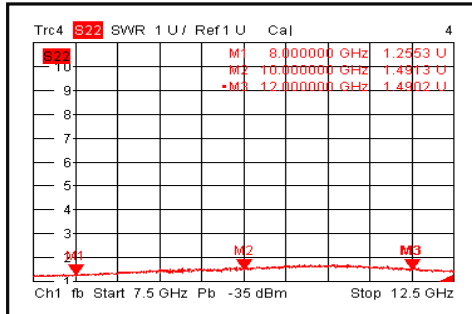


Isolation @+85°C

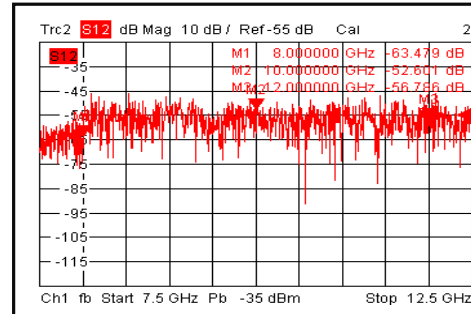


Gain vs. Output Power

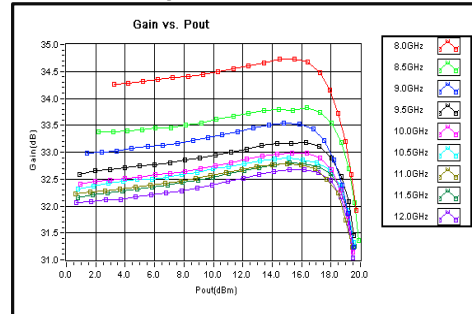


P1dB vs. Frequency

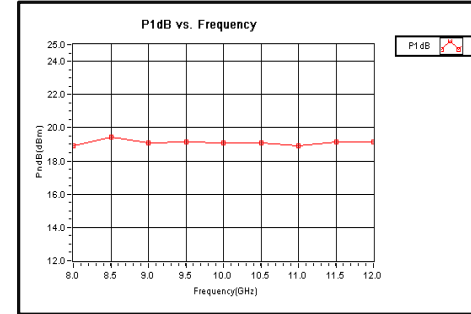


Output Third Order Intercept (IP3)

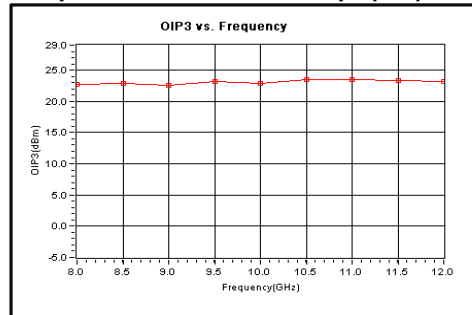


Noise Figure

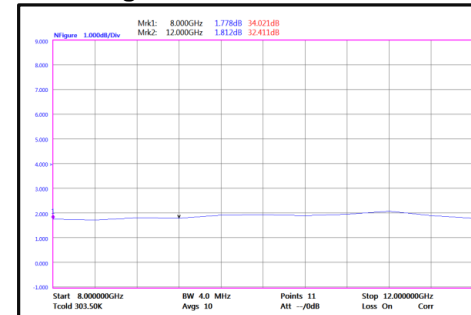

2nd Harmonic Wave Output Power

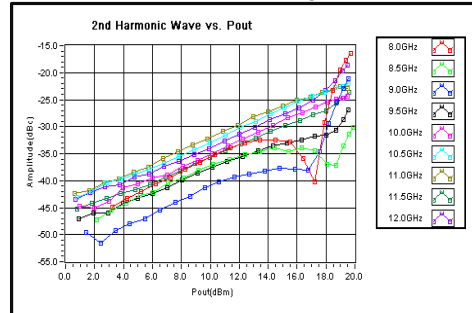

3rd Harmonic Wave Output Power

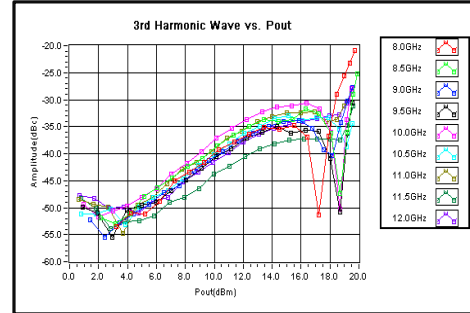

4th Harmonic Wave Output Power

